

# Ditec DAS107

## Automation for sliding doors

**Ditec DAS107** is the new sliding door operator focusing on the needs of customers and featuring **high quality components at the right value**.

Designed for a **simple and efficient installation**, Ditec DAS107 can satisfy all requirements in standard commercial environments with frame weight up to **160 kg**.

Ditec DAS107 is easy to set-up with **automatic self-learning** and **digital display** and it is the perfect choice for customers who look for **low inventory cost and ease of maintenance**.



## Product specifications

EN


## Technical data

Description	automation for sliding doors
Drive type	electromechanical unit
Gearmotor	24 V DC with encoder
Power supply	110-220 V~ ±10% 50-60 Hz
Max nominal power	100 W
Auxiliary power	1.0 A @ 24 V DC
Operating temperature	-20°C / +50°C
Protection rating	IP20
Dimensions (H x D x L)	120x140xL mm
Max operator length	4400 mm

## Operational functions

Program selector mode	
- Automatic	■
- Permanent open	■
- Partial open	■
- Exit only	■
- Permanent close	■
Automatic reversal in case of obstacle	■
Key command	■
Continuous closing force	■
Self-learning	■
Parameters adjustment by display	■
Error message by display	■

## Example of installation

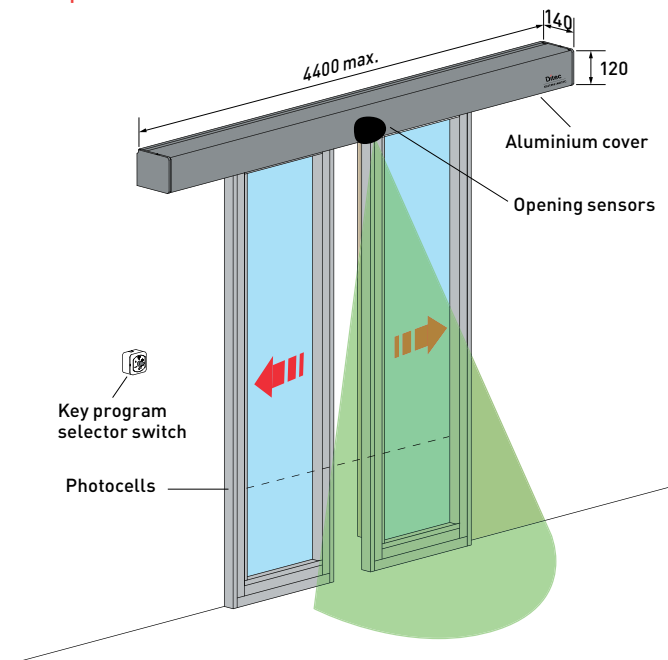

## Door performance

Max door panel weight	120 kg (1 wing) 160 kg (2 wings)
Opening and closing speed	1.0 m/s bi-part door (adjustable)
Hold open time	0-60 s (adjustable)
Max clear passage (with 50 mm frame)	2140 mm (1 wing) 1120 mm x 2 (2 wings)
Endurance test	1 M cycles

## Additional equipments

Movement sensors (max 2 radars)	<input type="checkbox"/>
Couple of photocells	<input checked="" type="checkbox"/>
Battery pack 12 V DC (emergency)	<input type="checkbox"/>
Fail safe lock	<input type="checkbox"/>
Fail secure lock (with handle)	<input type="checkbox"/>

optional

as standard

## Specific accessories

- **DAS801LOK**: secure lock with external handle release
- **DAS801LOKA**: safe lock
- **DAS901BAT1**: battery kit, 12 V power supply for emergency use only
- **DAS107B44N**: casing L = 4400 mm ALU anodized
- **DAS107C44G**: cover L = 4400 mm mill finish
- **DAS107C44N**: cover L = 4400 mm ALU anodized

Many more accessories available from the Ditec Entrematic catalogue.



**DAS901BAT1**



### Entrematic Italy S.p.A.

Largo U. Boccioni, 1 · 21040 Origgio (VA) · Italy

Tel +39 02 963911 · Fax: +39 02 9650314

ditec@entrematic.com

www.ditecentrematic.com · www.entrematic.com

Ditec DAS107  
Product specifications - 05/2016

