

# Trilock 60



**BOON EDAM**

**The Trilock 60 is an attractively finished tripod turnstile, suited for high volume, abusive applications, such as stadiums, arenas or other “busy” settings. The turnstile features an exceptionally quiet action during passage and is available in mechanical or electric models.**

**Options**

- Pedestrian counter
- Coin / token operation
- Extended arm length
- Red and green indicator lights
- Platform and railing and wheels
- Out-of-use lock

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system.


 *your entry experts*



## Dimensions and Specifications

A	B	C	D	E	F	G			
Passage Width	Capacity / Minute*	Disabled Access	Type of Traffic	Overall Width	Arm Length	Arm Height	Overall Height	Unit Length	Unit Width
18"	20-25	x		25"	16"	33"	38"	27"	7"
20"	20-25	x		27"	18"	33"	38"	27"	7"
22"	20-25	x		29"	20"	33"	38"	27"	7"

\* Depending on access control system, in one direction

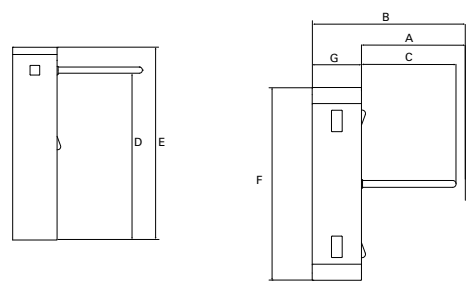

## Features and Options

Characteristics	Standard	Option
Fail-lock or fail-safe	•	
Free or locked exit	•	
2-way independent controls	•	
Transformer step-down (electric models)	•	
Complete stainless steel construction	•	
Pulse relay	•	
Time-out relay	•	
Coin / token operation		•
Rotation detection switch		•
Remote release button		•
Pedestrian counter		•
Serial port interface		•
Electronic key bypass		•
Mechanical key bypass		•
Red and green indicator lights		•
Powder coated color choices (RAL ref)		•
Platform, railing and wheels		•
Out-of-use lock		•
Canvas turnstile cover		•
Heavy-duty foam sleeves for arm cover		•
Extended arm length		•

## Emergency Egress

The Trilock 60 is available with fail-safe or fail-secure operation. While the fail-secure model ensures that the entrance stays closed in case of emergency or power failure, the fail-safe model will free the passage by allowing free rotation of the arm set. Alternatively, if a fire alarm is connected, the fail-safe function can automatically be activated upon receipt of a fire alarm signal.

## Technical Specifications

Power Supply:	110 or 220 VAC, 50/60 Hz
<b>Power Consumption</b>	
Operating:	220W
Ambient Temperature:	+5°F to +113°F
Weight:	110 lbs (65 kg)