


# Uniko Evolution



UNIKO - 1M EVOLUTION - cod. 72110000  
Single-head central motor for rolling shutters

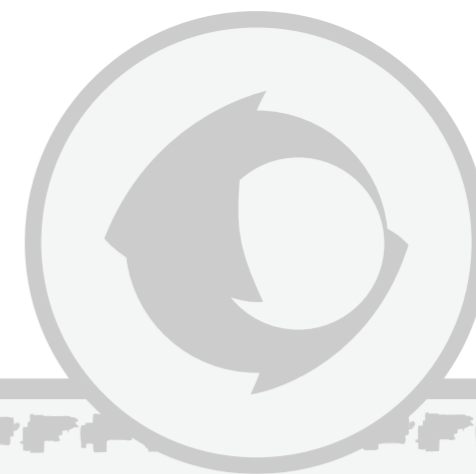

UNIKO - 2M EVOLUTION - cod. 72210000  
Double-head central motor for rolling shutters

This series can be defined as a phenomenon of adaptability to all rolling shutters balanced with compensation springs thanks to a continuous improvement of the functional characteristics of the motors and their innovative design. We produce two versions of the motor Uniko: the single-head and the double-head model.

## Technical characteristics

Model	Ø rolling shutter tube mm	Ø winding flange mm	Power W	Amperage A	% Services	Voltage V	Frequency Hz	Insulation Class	Capacitor in mF	R.P.M.	Torque Nm	Lifting capacity Kg
UNIKO - 1M EVOLUTION	42* - 48* 60	200	450	2	90	230	50	F	16	9	142	145
		220**										132
UNIKO - 2M EVOLUTION	42* - 48* 60	200	700	3	110	230	50	F	20	9	196	200
		220**										183

\* with tube adaptor \*\* with flange adaptor

## Accessories



Electromagnetic brake  
Cable 4 meters  
cod. 75130000



Brake release handle  
cod. 75160000



Kit flange adaptor Uniko  
from Ø 200mm  
to Ø 220mm  
cod. 75270000

Kit flange adaptor Uniko  
from Ø 200mm  
to Ø 206mm  
cod. 75290000



Tube adaptor  
from Ø 60 mm  
to Ø 48mm  
cod. 75260000

Tube adaptor  
from Ø 60 mm  
to Ø 42mm  
cod. 75250000